


# LIGHT

---

**LIGHT**



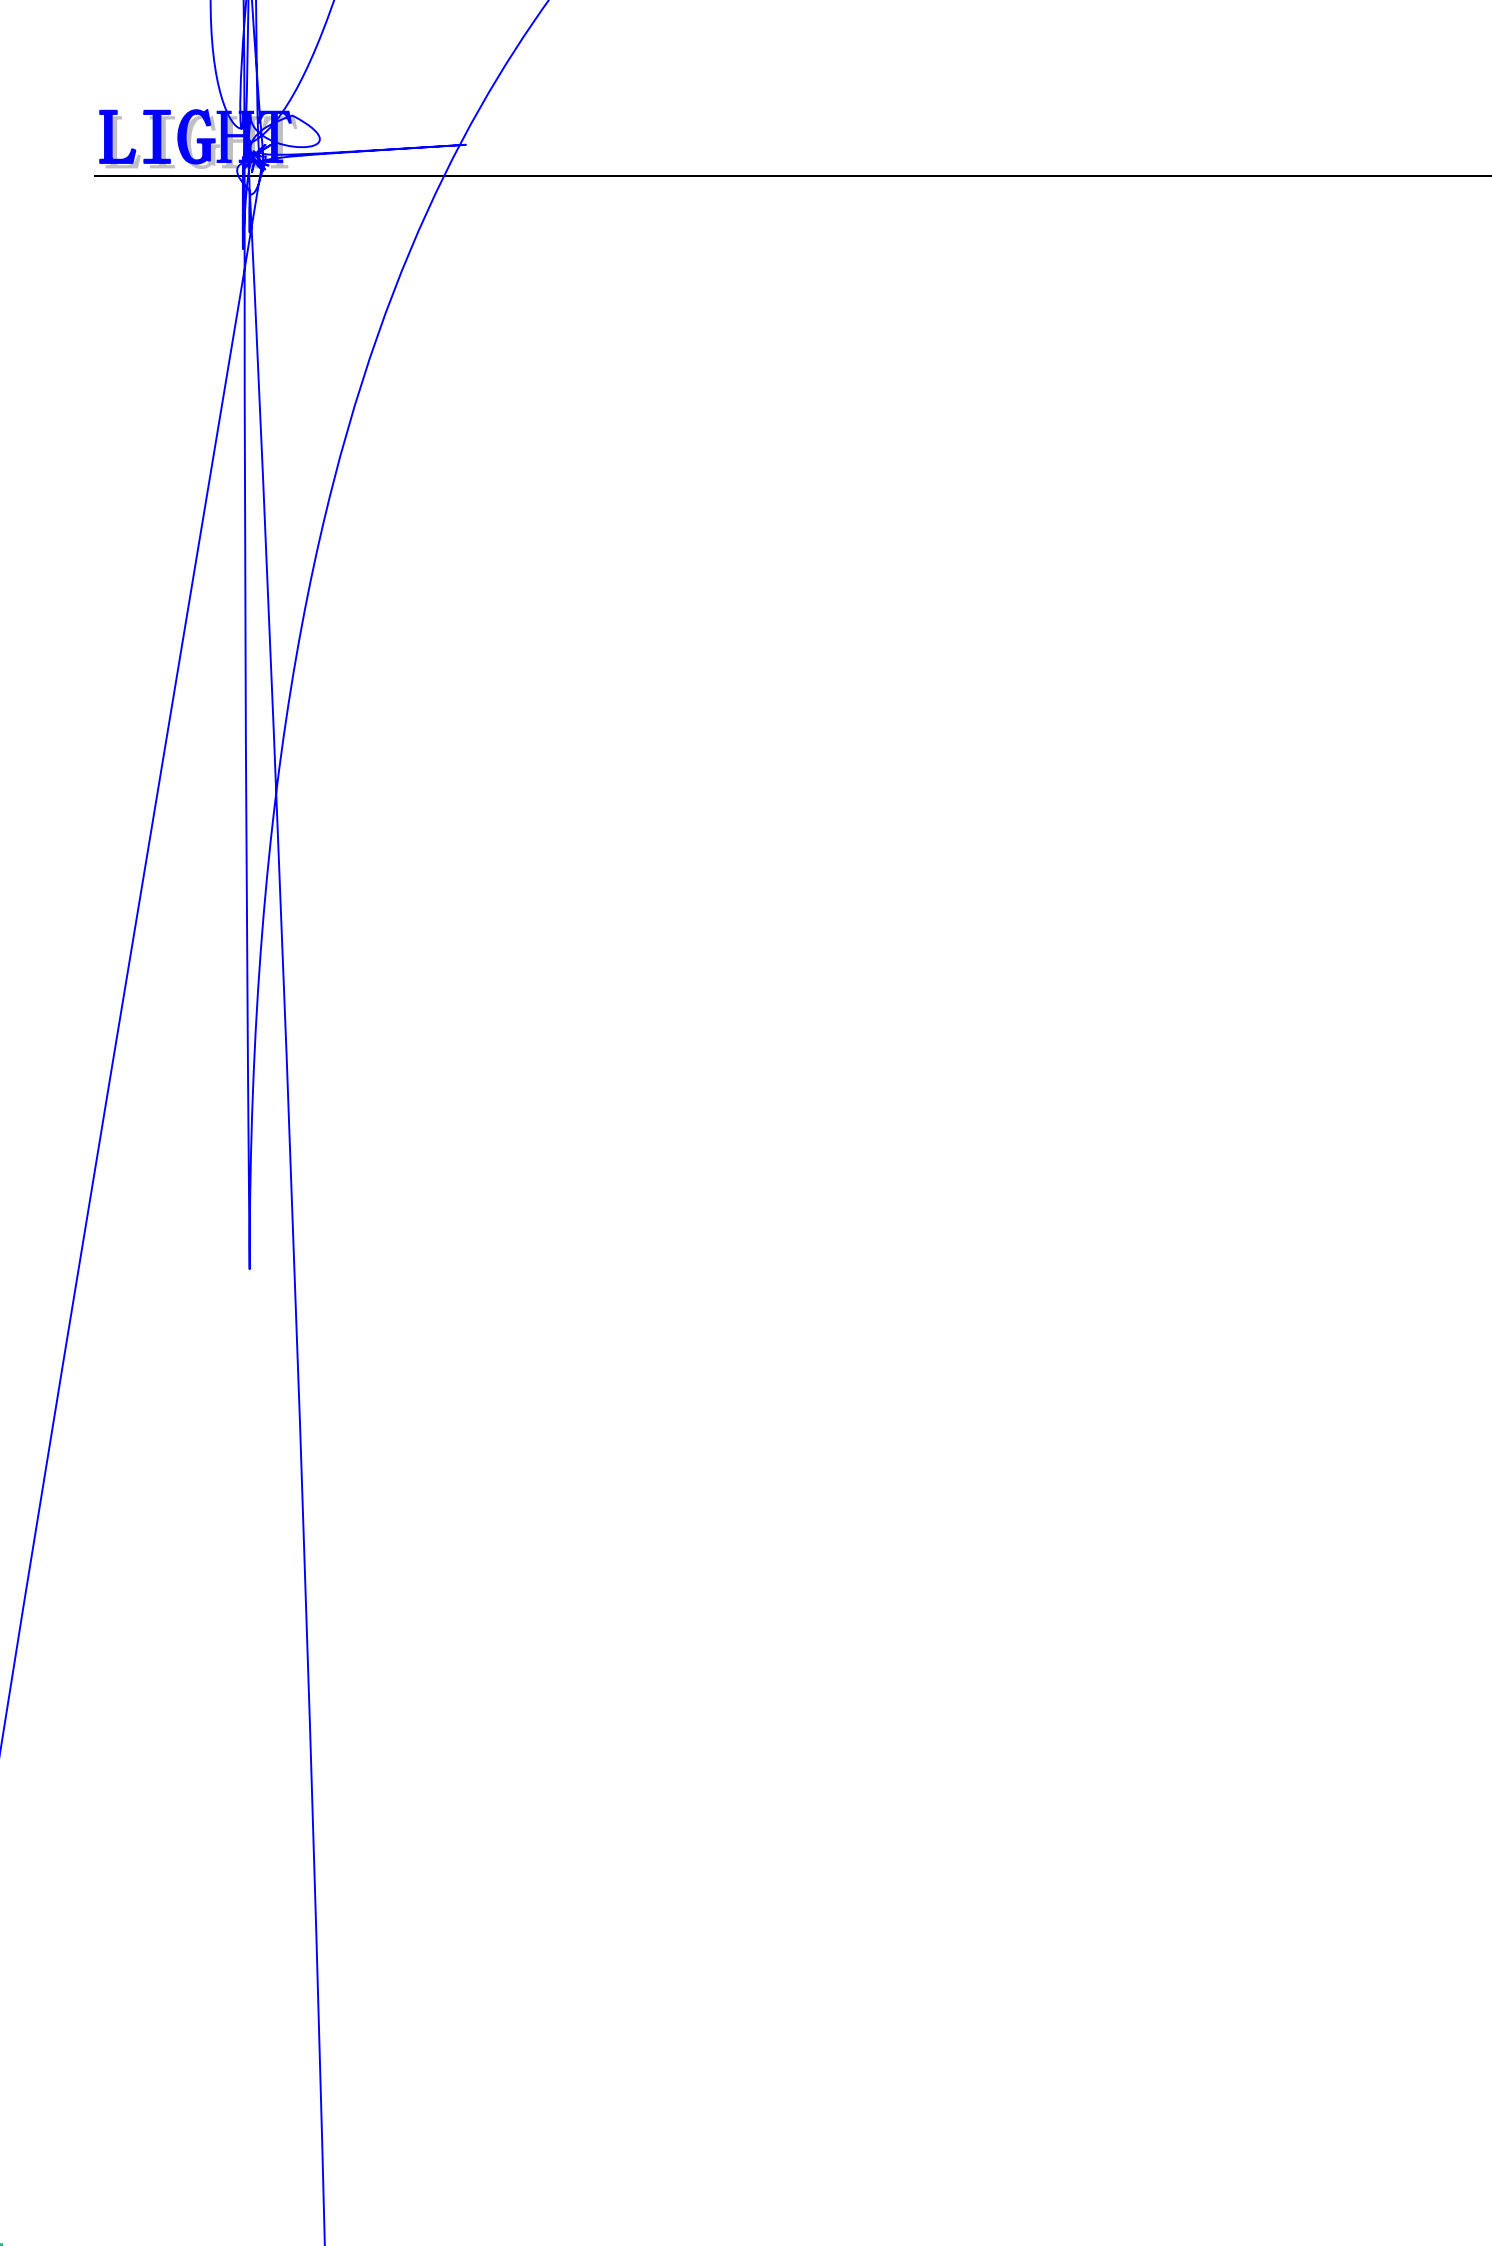




## Reliability Test Items And Conditions

实验项目	参考标准	实验条件	时间	样品数	判据
		←→			

## Product design and operational recommendation

1 mm


Product design Unit: mm

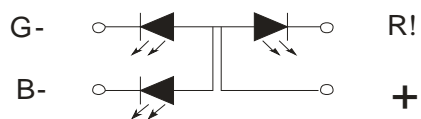

w w w


2 mm

Recommended soldering pad (Unit: mm)

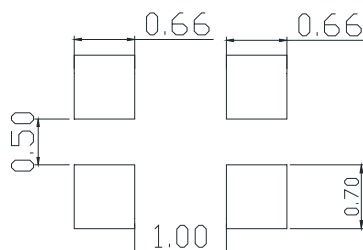

3 0.75mm

Recommendation for glue filling: filling height must be higher than or equal to 0.75mm

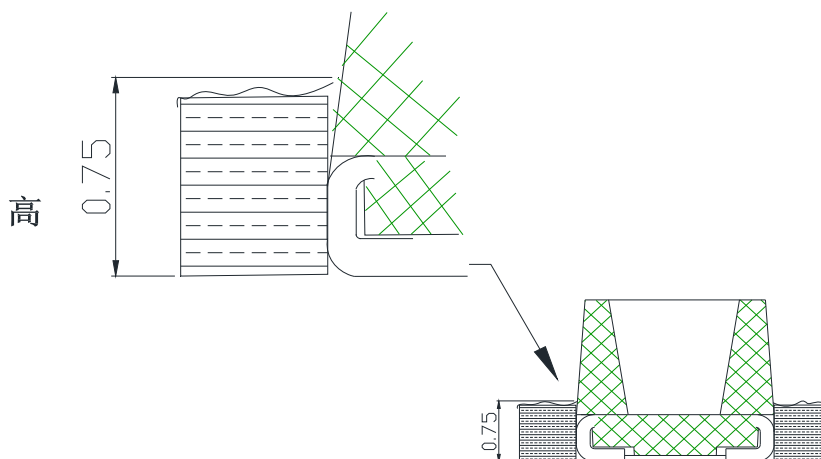

## 1

### Packaging (1)


✧ Carrier Tape

✧


## 2

### Packaging( 2)

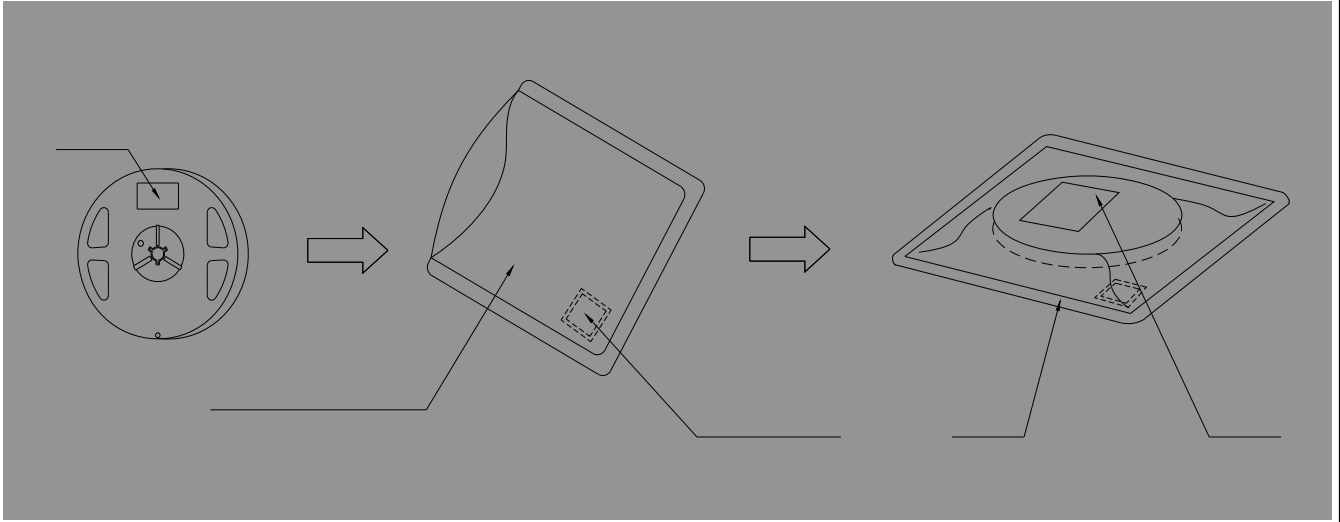

✧ **Moisture Proof and Anti- Electrostatic Foil Bag**

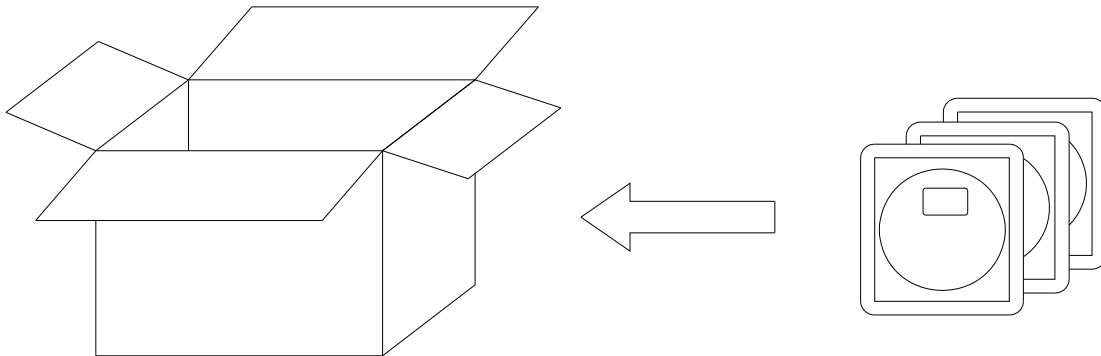

✧ **Cardboard Box**



✧ **Label Explanation**

<b>LIGHT</b>	Light Electronics CO., LTD.	
TYPE NO.:	_____	 <small>LOT NO.</small>
QUANTITY:	_____	
BIN:	_____	
DATE CODE:	_____	
REMARKS:	_____	




# LIGHT

---



## Guideline for Soldering (2)

- x ·
- x ·
- x ·
- x ·

(1)

**Precautions (1)**

1.

**Storage**

•

•

•

•

•

y

y

y

2.

**Static Electricity**

•

•

•

(2)



## Precautions (2)

3.

### Design Consideration

- 

- 

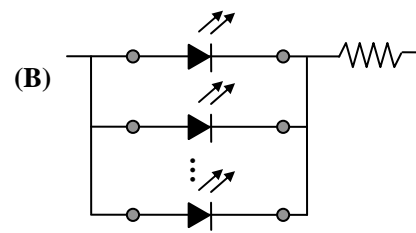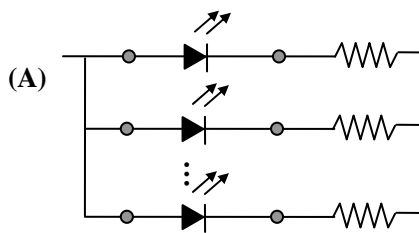

- 

4.

### Reverse voltage protection

-


5.

### The safe temperature for LEDs working

- 

6.

- 

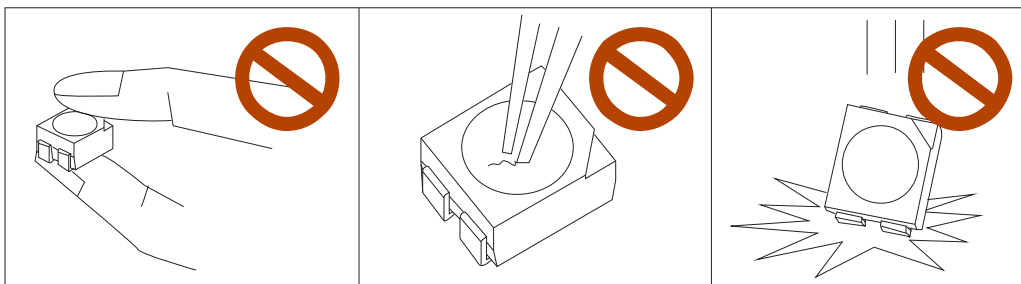

-