


SL-T3020IRC050-L223-C-S

Features

Package Dimension

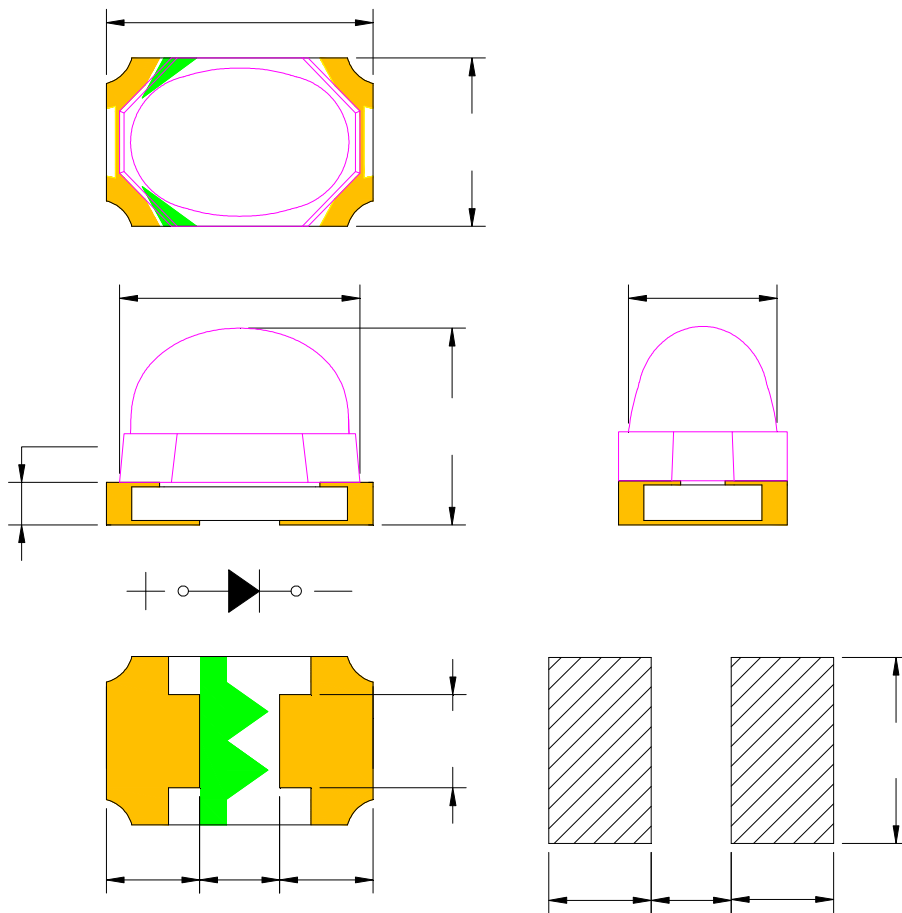

Notes:

Absolute Maximum Ratings at Ta=25




1. Storage and operating:


2. Peak Forward Current:

3. Caution in ESD:







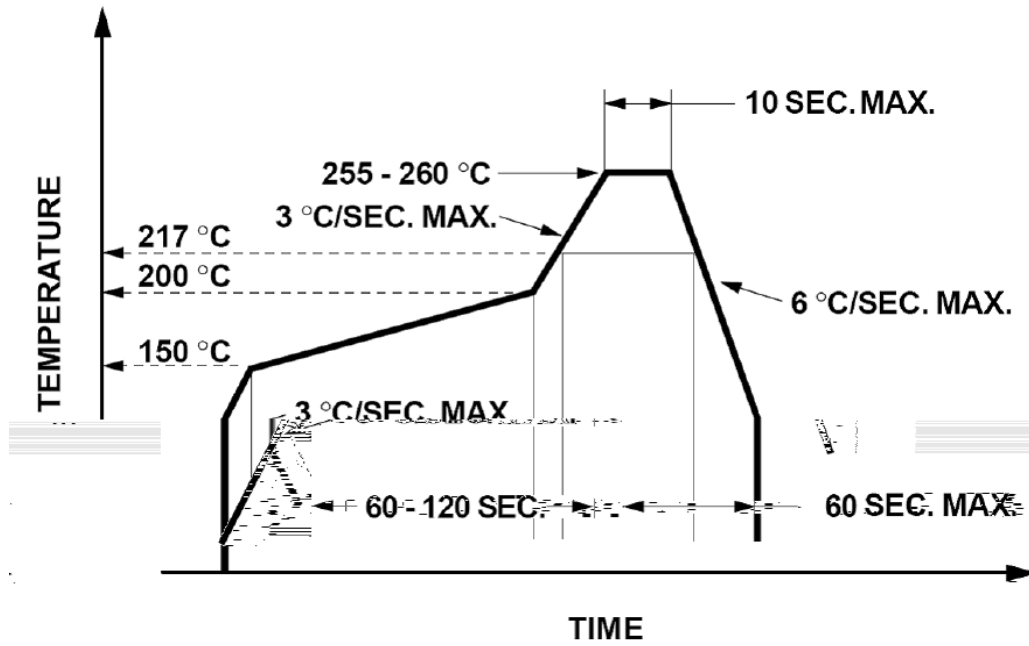

°C

