



FEATURES



- .
- .
- .

TYPICAL APPLICATIONS


- .
- .
- .

KEY CHARACTERISTICS

Parameter	Value	Unit
	×	



DIMENSIONS

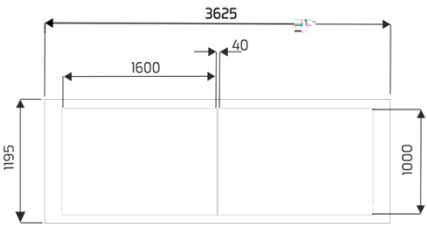

### Absolute Maximum Ratings (Ta=25 °C)

Parameter	Symbol	Min.	Max.	Unit

### Electro-Optical Characteristics (Ta=25 °C)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\lambda$	Spectral response range	---	400	---	1100	nm
$\lambda$						
$\theta$						

### Spectral Sensitivity

