


LIGHT ELECTRONICS CO., LTD.





LIGHT ELECTRONICS CO., LTD.

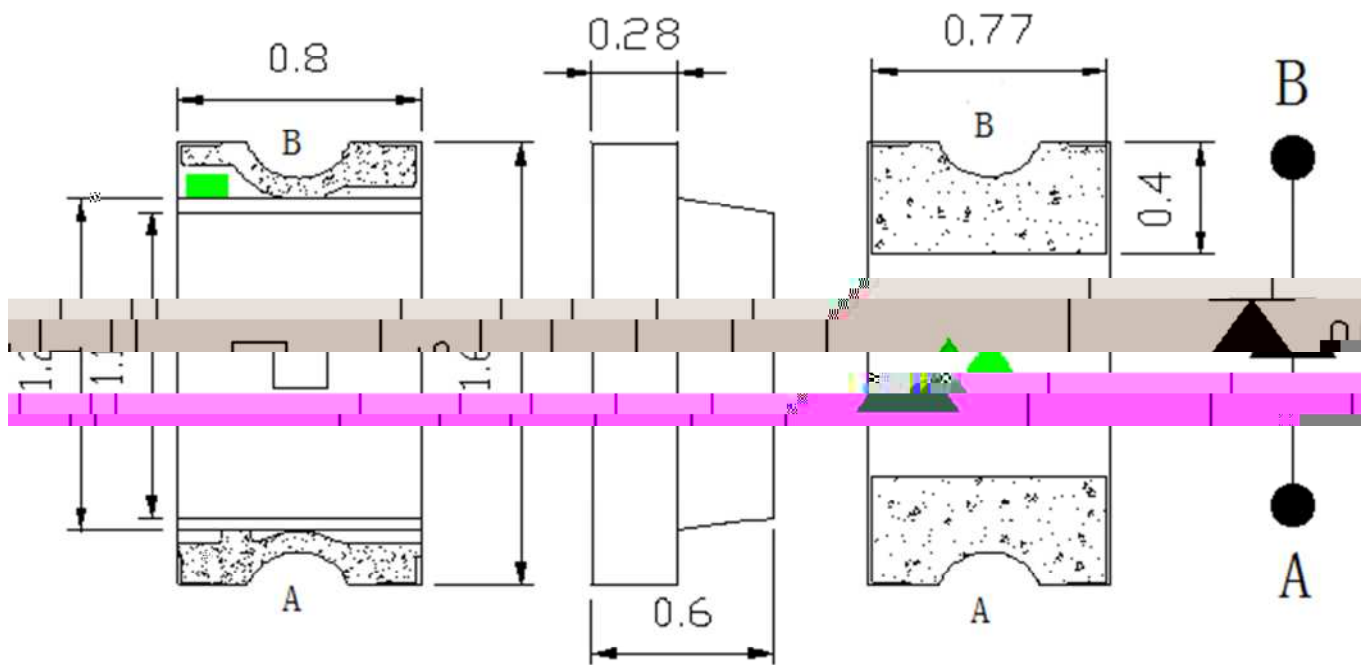

FINCH


LIGHT ELECTRONICS CO., LTD.

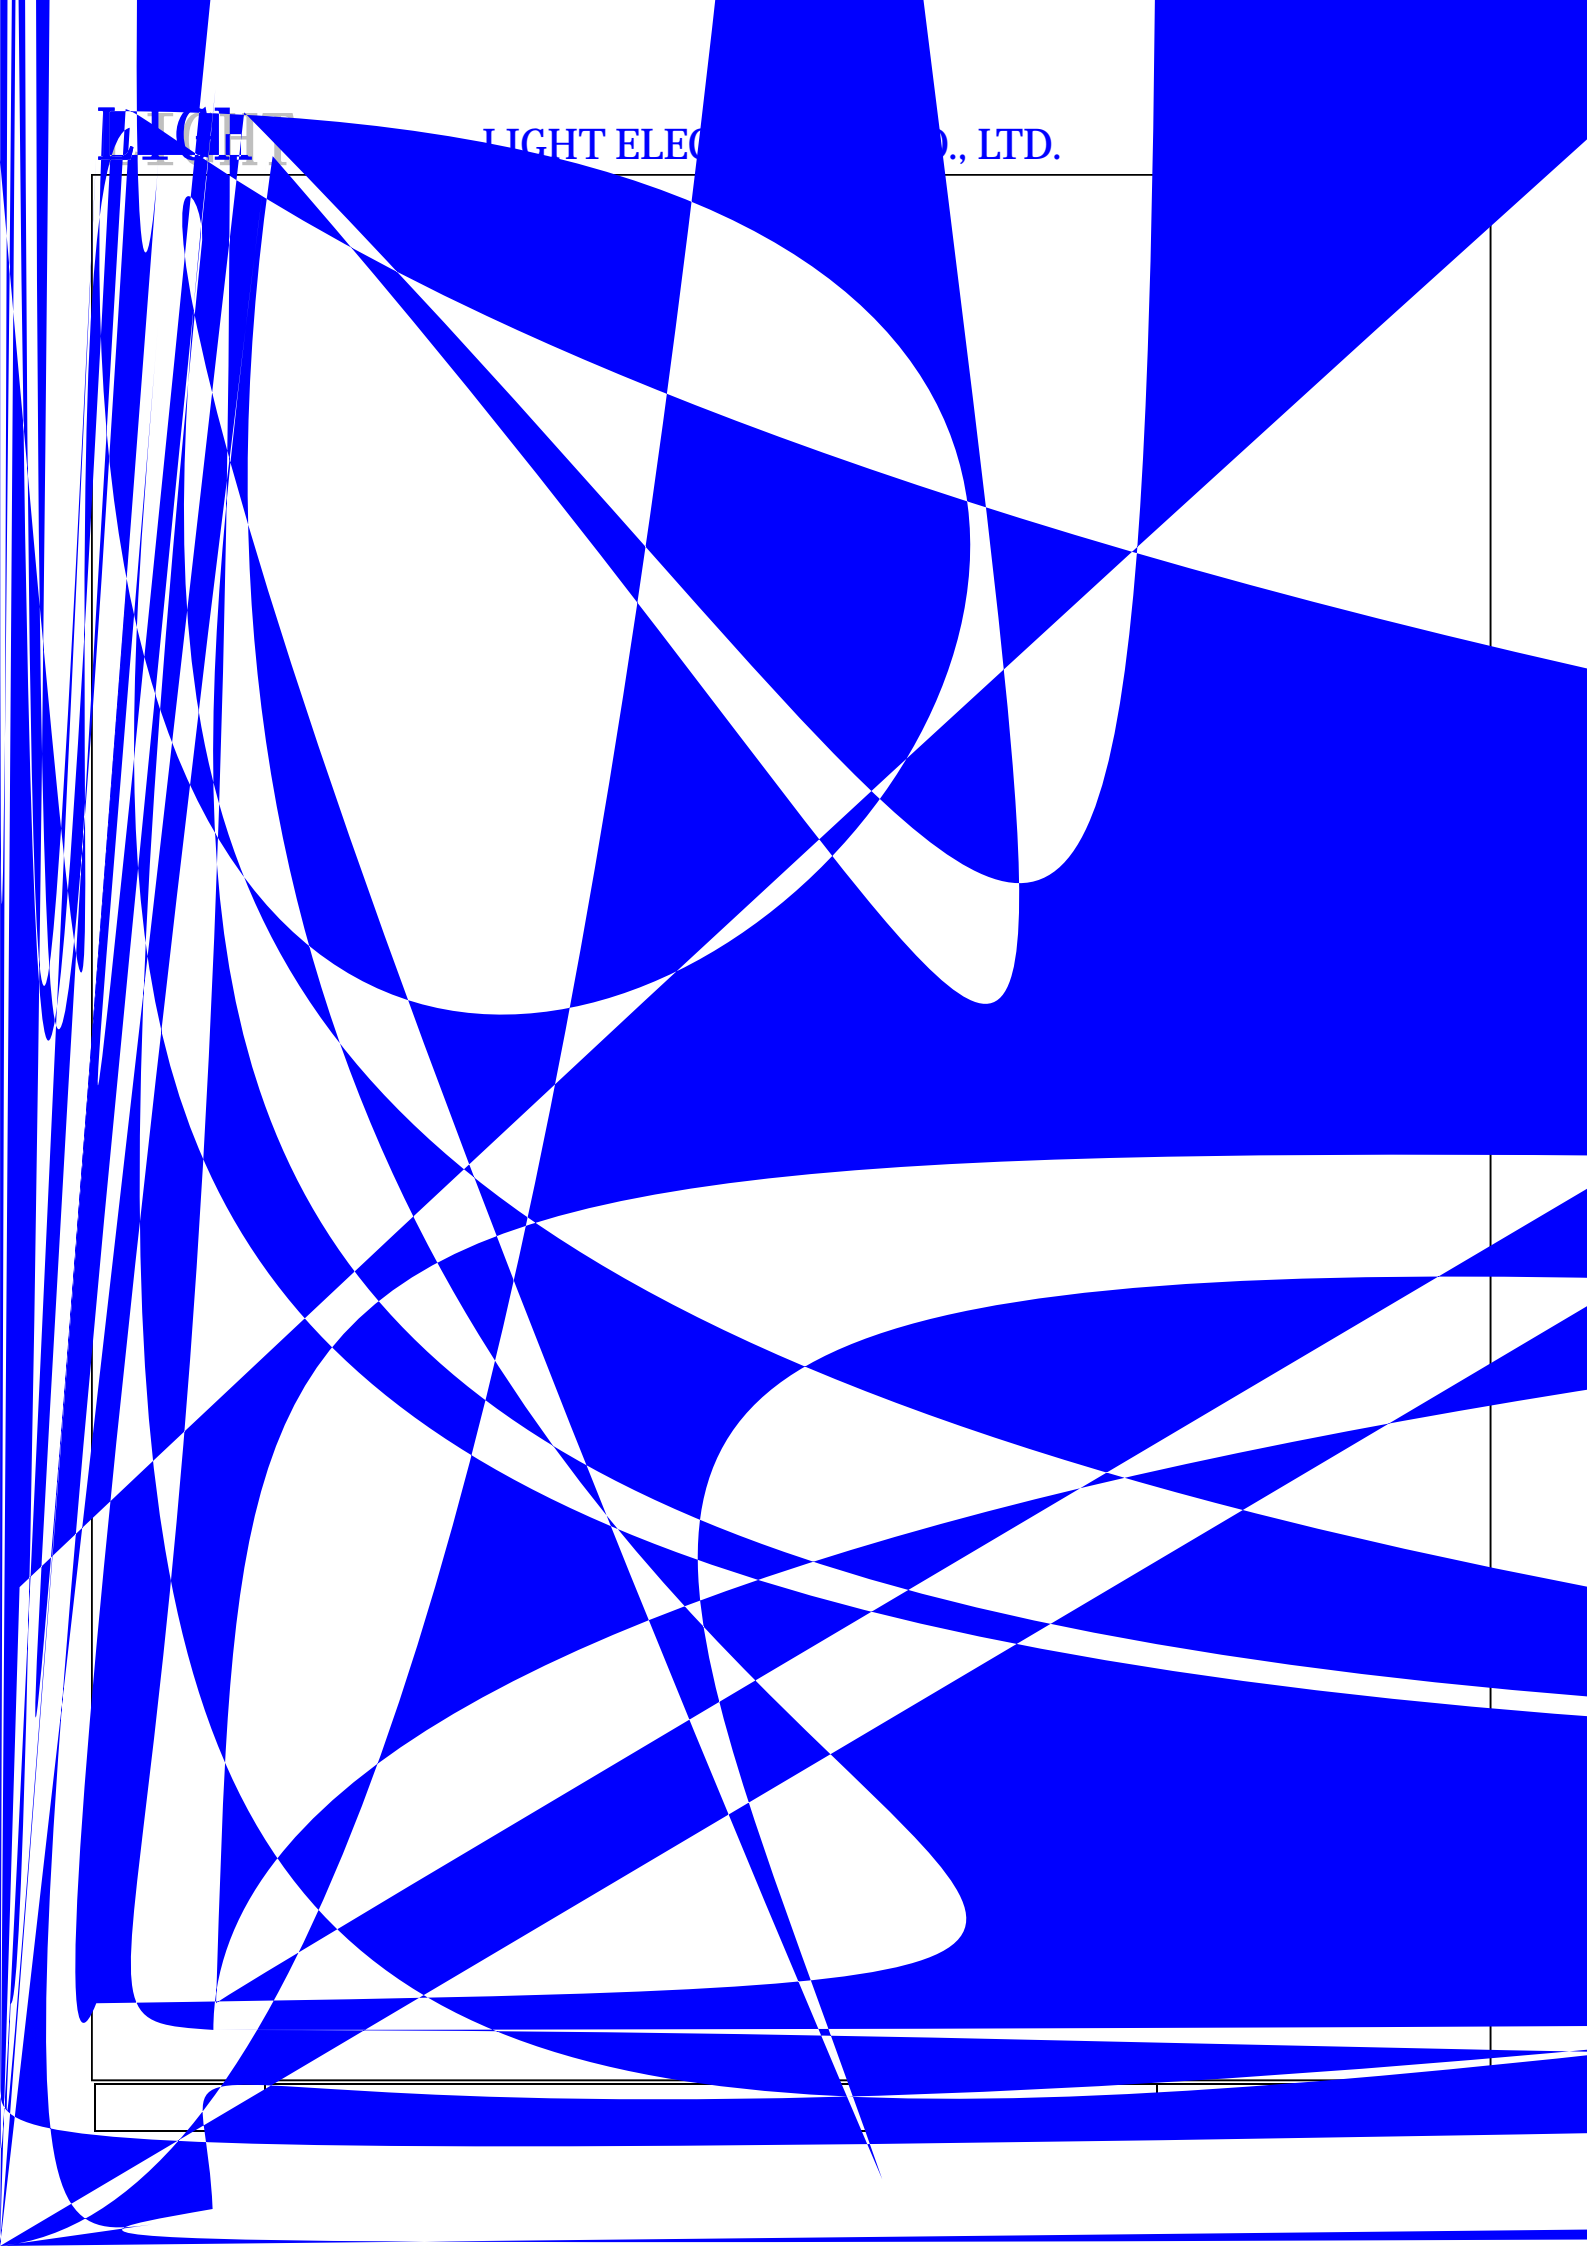

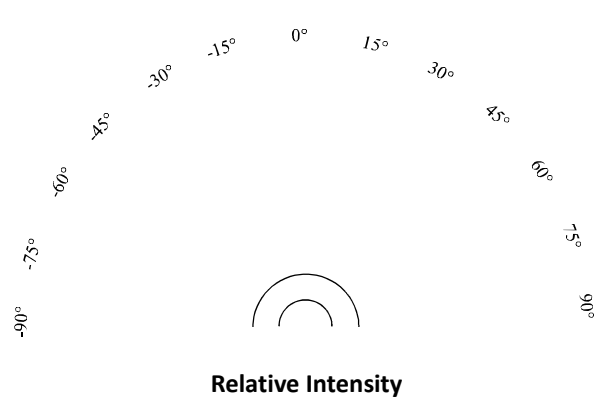 <p>Relative Intensity</p> <p>Ambient Temperature()</p>	


--	--	--	--

Chromaticity Coordinates (Ta=25°C, IF=20mA)

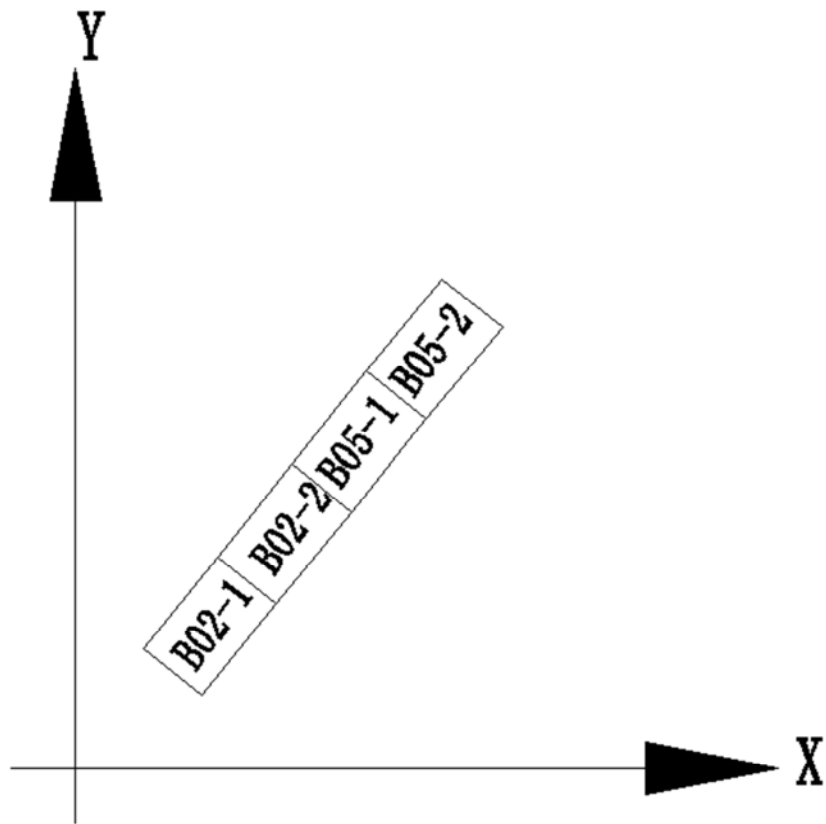


色区	X1	Y1	X2	Y2	X3	Y3	X4	Y4
B02-1	0.2716	0.2542	0.2672	0.2564	0.2713	0.2650	0.2759	0.2628
B02-2	0.2759	0.2628	0.2713	0.2650	0.2753	0.2732	0.2800	0.2710
B05-1	0.2800	0.2710	0.2753	0.2732	0.2792	0.2815	0.2840	0.2792
B05-2	0.2840	0.2792	0.2793	0.2815	0.2832	0.2898	0.2881	0.2874

Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

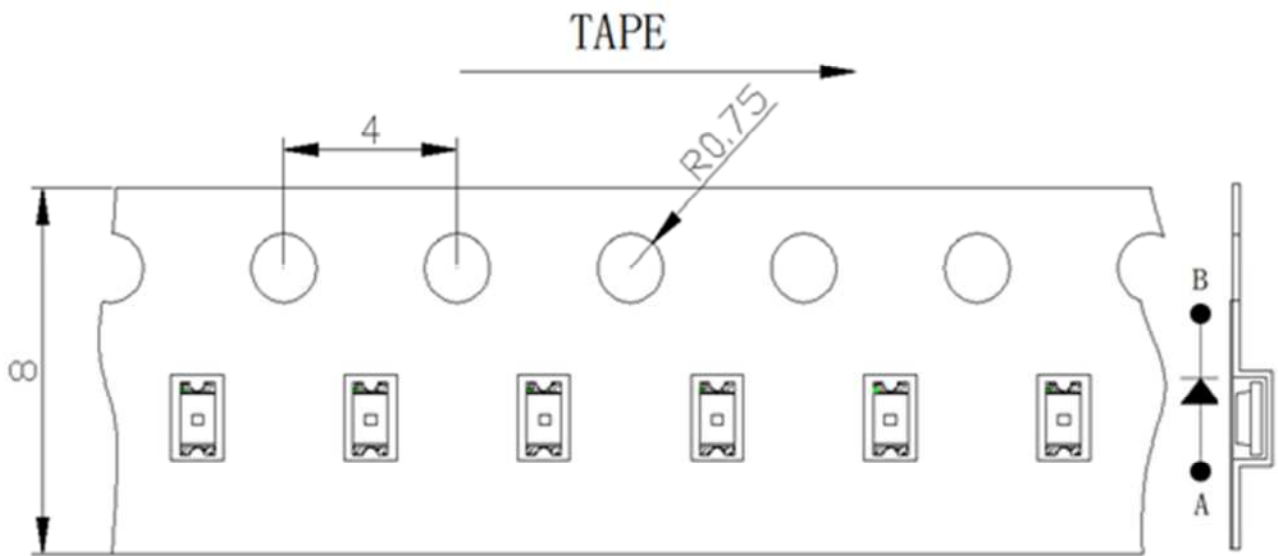


Moisture Resistant Packaging

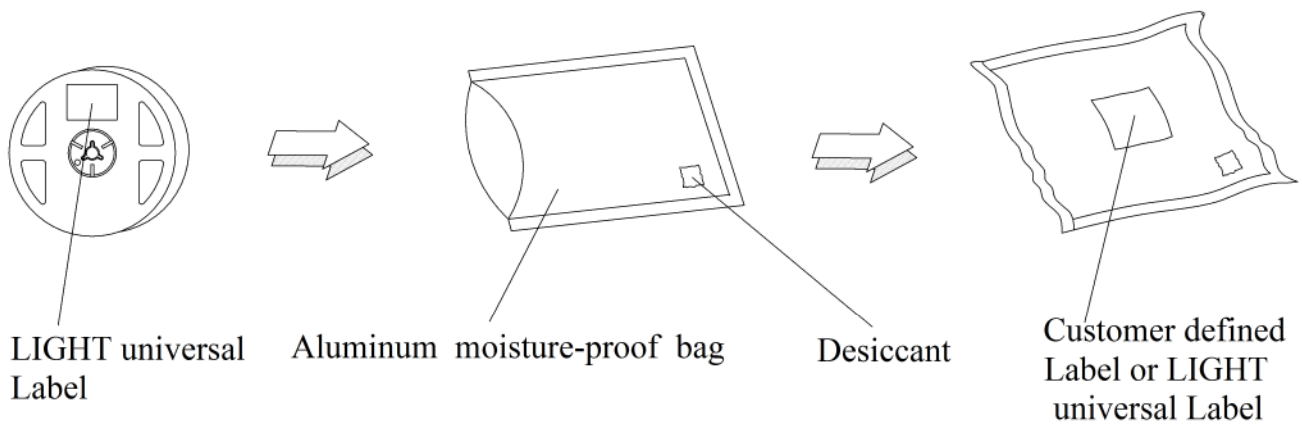

Suggest

and Free

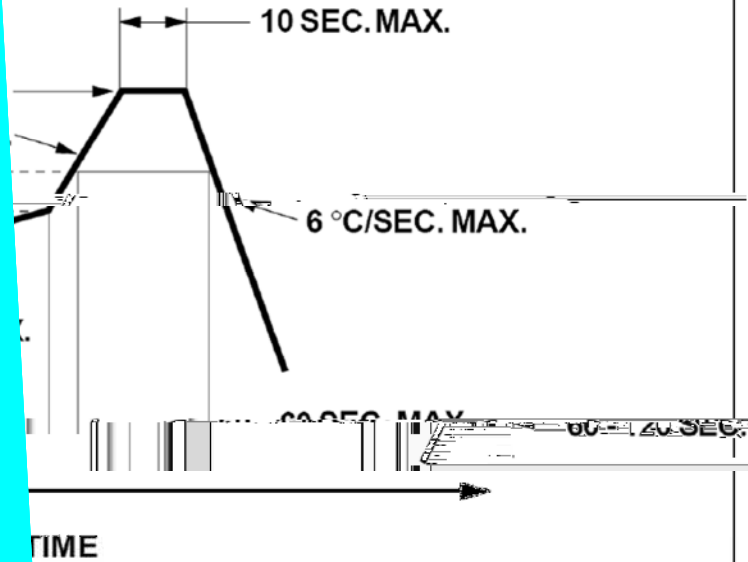

1. Reflow ... two times.
2. When ... during heating.

Soldering

1. When I ... must less than 300°C for 3 seconds.
2. The har

Repairing

Repair sho ... n soldered. When repairing is unavoidable, a
 double-hea ... y figure). It should be confirmed beforehand
 whether the ... be damaged by repairing.