


LIGHT



LIGHT

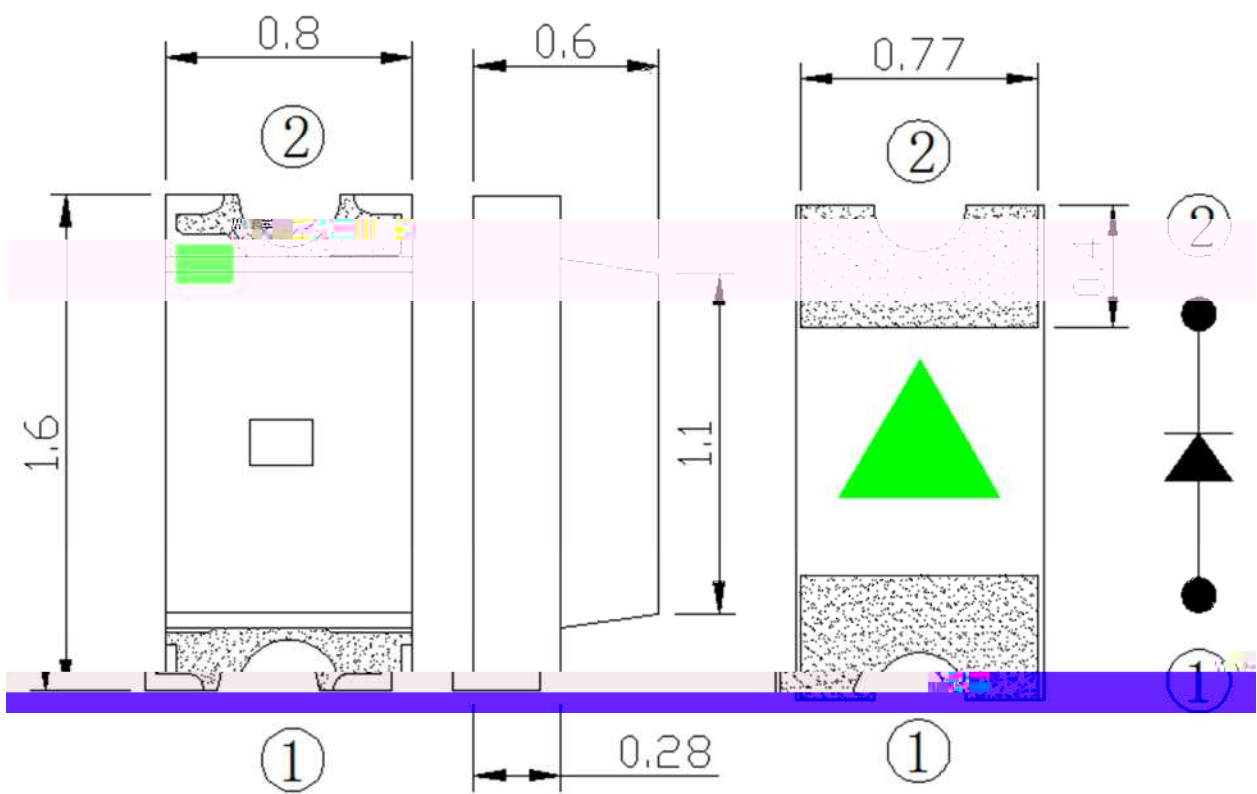


Viewing Angle	2					
Peak Emission Wavelength	p	---	472	---	nm	I
Dominant Wavelength	d	465	---	473	nm	I

The dominant wavelength, d is derived from the CIE chromaticity diagram and represents the

--	--	--	--

LIGHT



LIGHT 

Light Electronics CO., LTD.


MODEL NAME: _____


QUANTITY: _____

BIN: _____

PACKING DATE: _____

REMARKS: _____

 LOT NO: _____

LIGHT 

Light Electronics CO., LTD.


MODEL NAME: _____

QUANTITY: _____

BIN: _____


PACKING DATE: _____

CUSTOMER P/N: _____




 LOT NO: _____



Carrier Tape Specifications (Loaded Quantity: 1000pcs/roll)

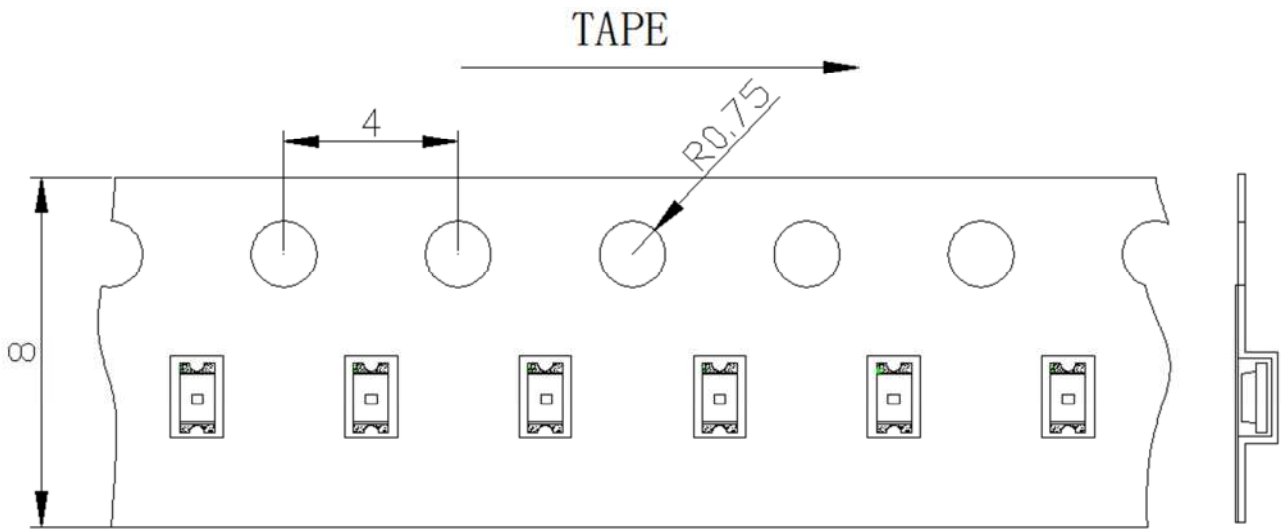

Moisture Resistant Packaging




LIGHT universal Label

Aluminum moisture-proof bag

Desiccant

Customer defined Label or LIGHT universal Label

Suggest IR Reflow Condition For Lead Free

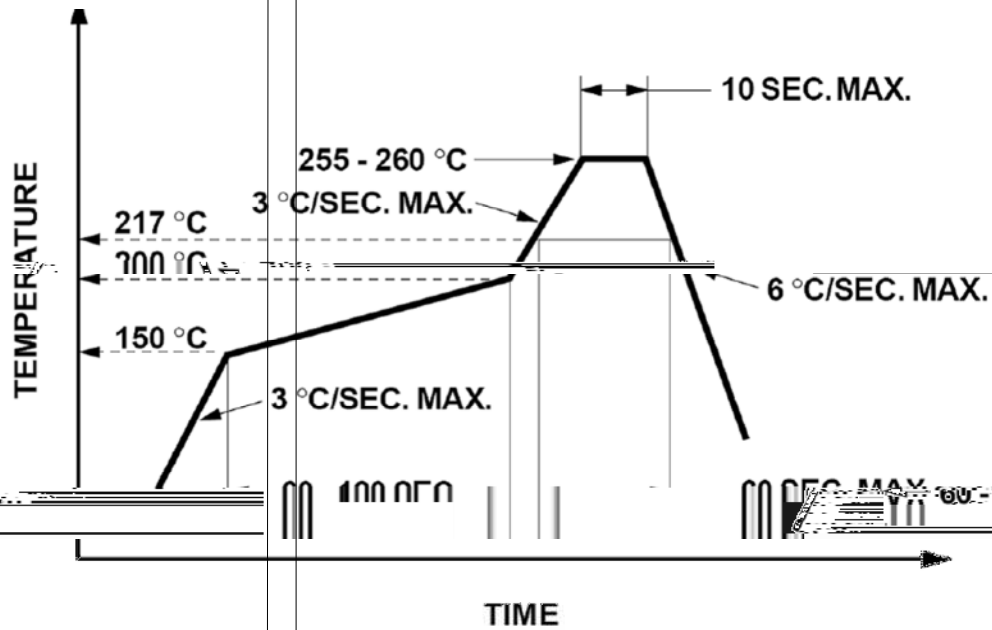

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

repairing is unavoidable, a
 should be confirmed beforehand
 repairing.