


Pb free product—RoHS compliant
 Low power consumption, High efficiency
 Reliable and rugged
 Long life – solid state reliability
 Good spectral matching to Si photo detector

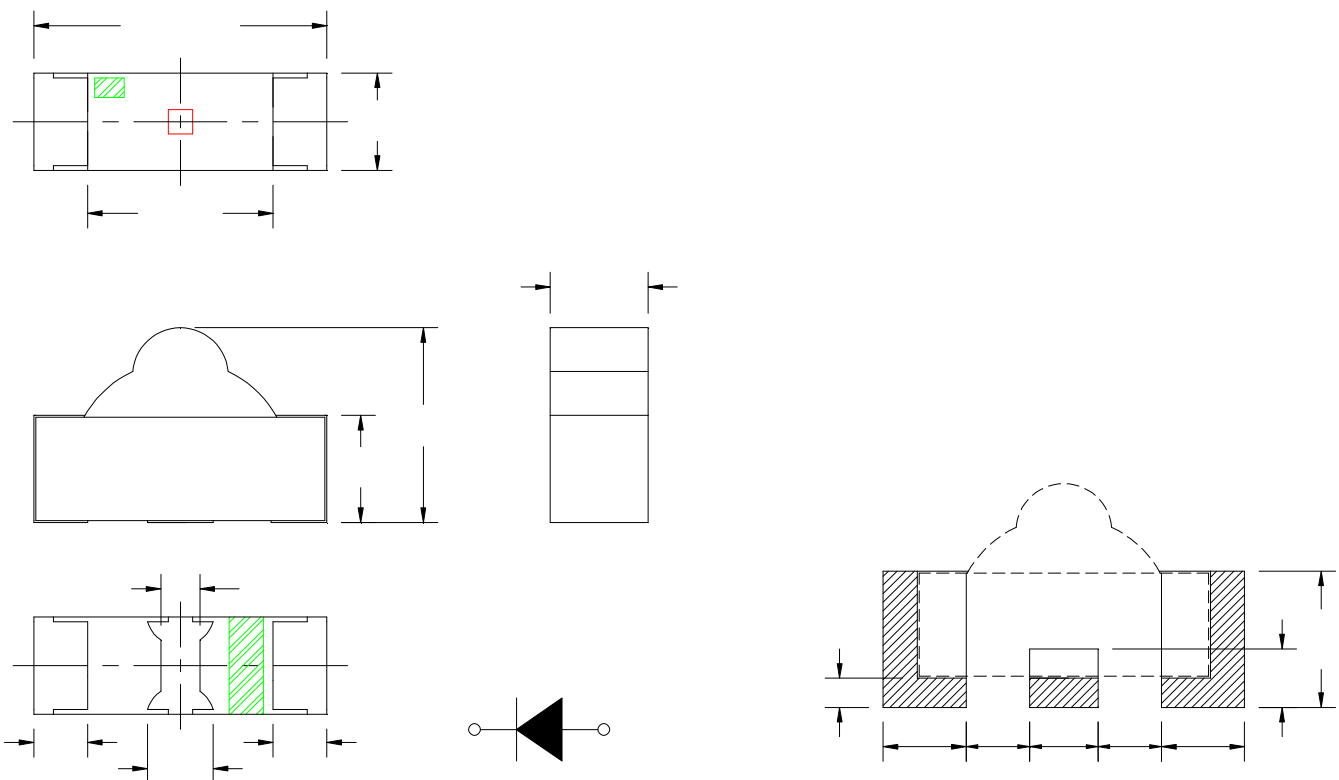

Part NO.	Chip Material	Lens Color
SL-T3010IRC020-L200-Q	AlGaAs	Water Clear

1. All dimensions are in millimeters.
2. Tolerance is 0.10mm unless otherwise noted.
3. Specifications are subject to change without notice.


Parameter	MAX.	Unit
Power Dissipation	75	mW
Continuous Forward Current	30	mA
Peak Forward Current ^{*3}	100	mA
Reverse Voltage	5	V
Moisture Sensitivity Level ^{*1}	4	
Operating Temperature	-40 to + 85	
Storage Temperature	-40 to + 85	

Label Explanation

LIGHT 深圳莱特光电股份有限公司
 Light Electronics CO., LTD.


TYPE NO. : _____
 QUANTITY : _____
 BIN : _____
 DATE CODE : _____
 REMARKS : _____


 LOT NO. : _____



TYPE NO./	QUANTITY/
BIN./	DATE CODE/
REMARKS/	LOT NO./

Reel Dimensions

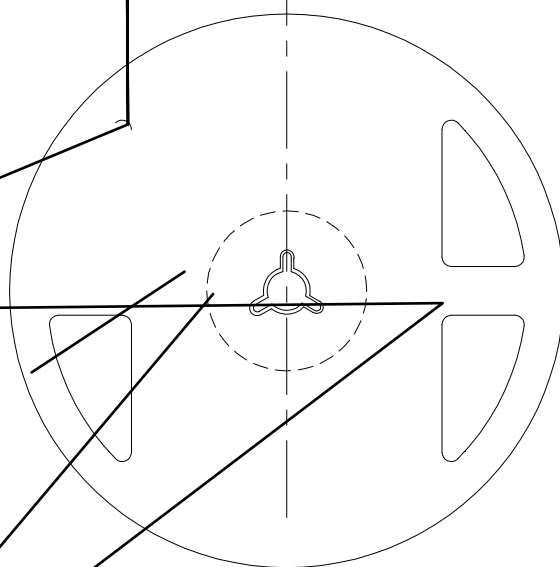



--	--	--	--

