

SL-T4234IRC150-L340-2PIN

DATA SHEET

SPEC. NO. : SZ19121601
DATE : 2019/12/28
REV. : A/1

Approved By:



Checked By:

Prepared By:


Features

- Pb free product—RoHS compliant
- Low power consumption, High efficiency
- Reliable and rugged
- Long life – solid state reliability
- Radiant angle: 20°

Package Dimension




Note:
 A: Nick Mark
 Vacant Pin



Part NO.	Chip Material	Lens Color
SL-T4234IRC150-L340-2PIN	AlGaAs/Si	Water Clear

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.10\text{mm}$ unless otherwise noted
3. Specifications are subject to change without notice.





PartNo.SL-T42

Typical Electrical / Optical Characteristics Curves
(25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

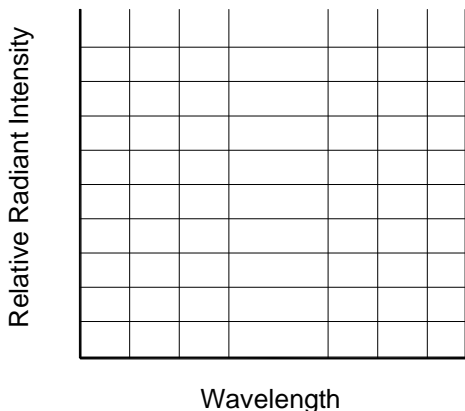


Fig.2 Forward Current Vs Ambient Temperature

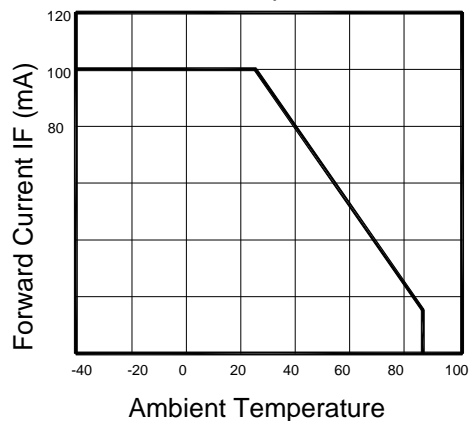


Fig.3 Forward Current Vs Forward Voltage

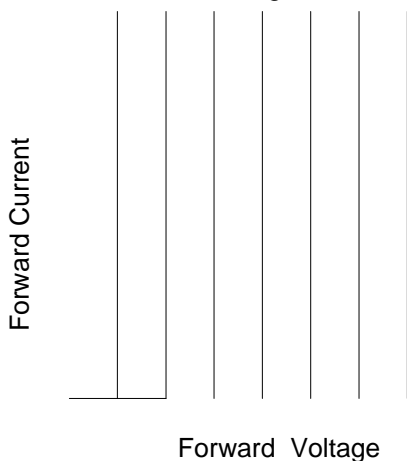



Fig.4 Relative Radiant Intensity Vs Ambient Temperature



Fig.5 Relative Radiant Intensity Vs Forward Current



Fig.6 Radiation Diagram

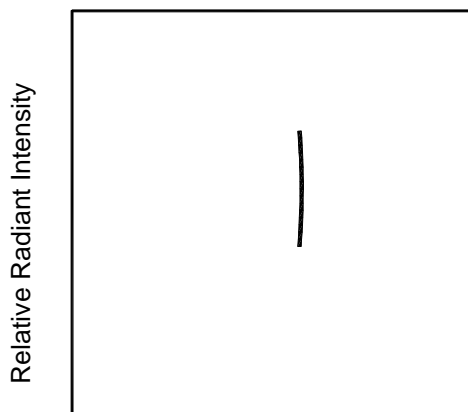

Label

Explanation

LIGHT Universal Label

Customer Defined Label

- * () 5
\$ i 9c (• +k6×3 ?L†ø .
/LJKW (OHFWURQLFV & 2 / 7'
02' (/ 1 \$0.
48\$17,7<
%,1
3\$&.,1* '\$7(
5(0\$5.6


RoHS

Y ÷ Á -
i H
; >û U
Ø mĩ -




Carrier rāpe ſe dif

ITEM	W	A0	B0	K0	E	F	D0	P	P0	P2	T
DIM	12.00	3.50	4.40	3.40	1.75	5.50	1.50	8.00	4.00	2.00	0.35
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.15 -0.15	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05


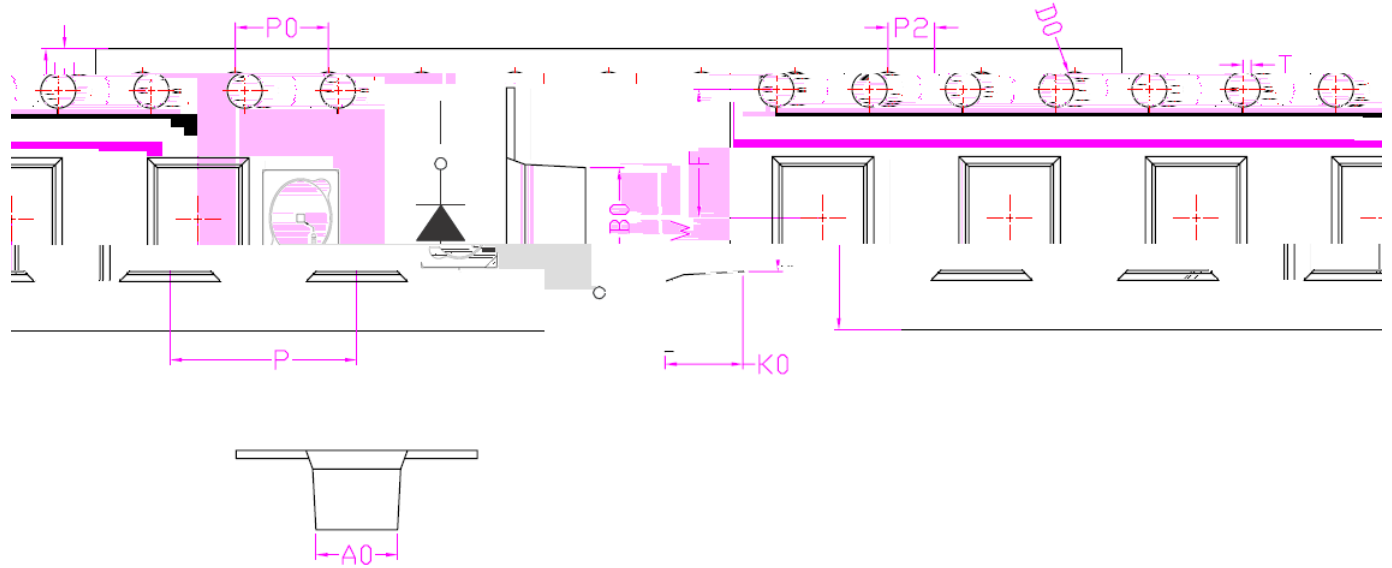


Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm



Mois tre Re s is tant Packag



LIGHT universal Label




Aluminum moisture-proof bag

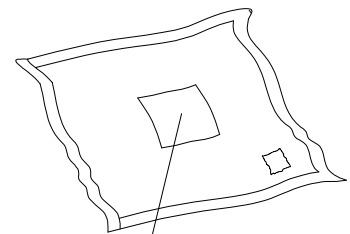

Desiccant

Customer defined Label or LIGHT universal Label

Reflow Soldering

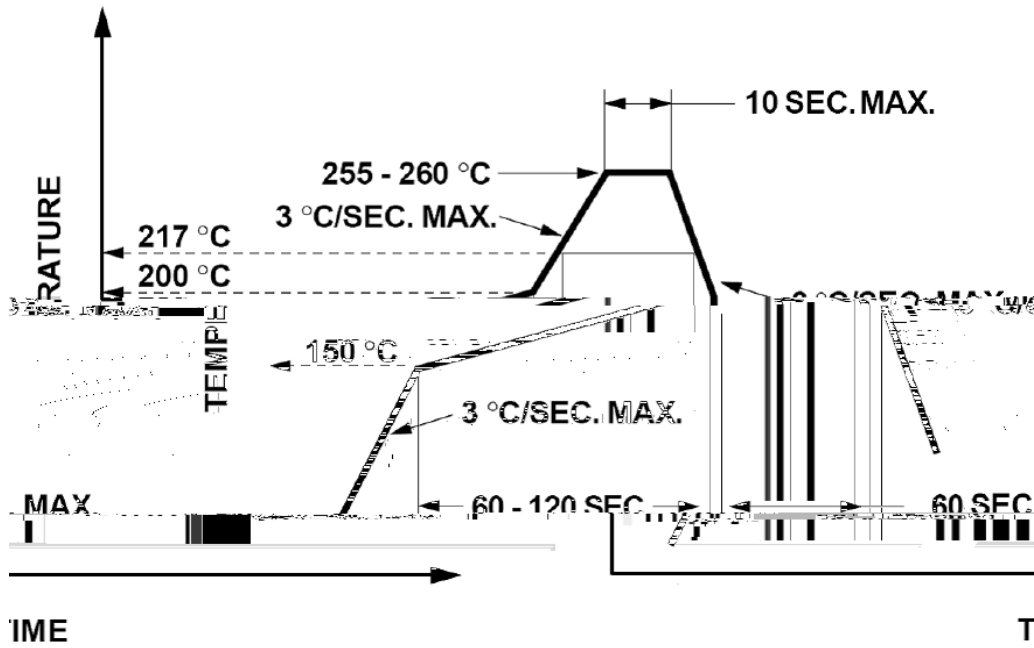

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

Hand Soldering with Iron

1. When hand soldering, the temperature of the iron must be less than 300°C for 3 seconds.