

Infrared Photo

to

Commodity: Infrared Photo diode

Reverse Light Current Bin Limits

BI N CODE	Min. (A)	Max. (A)
1	26	31
2	31	37
3	37	44
4	44	53


NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation

Unit


LIGHT Universal Label

Customer Defined Label

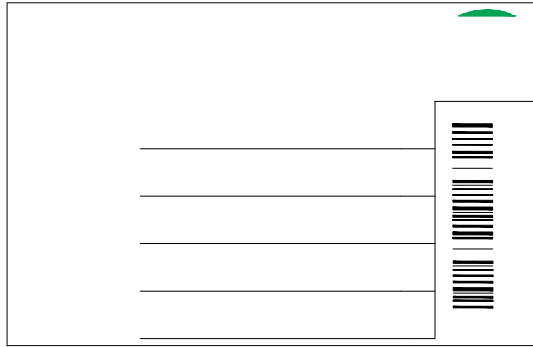

Carrier Tape Specification

ns (Lo

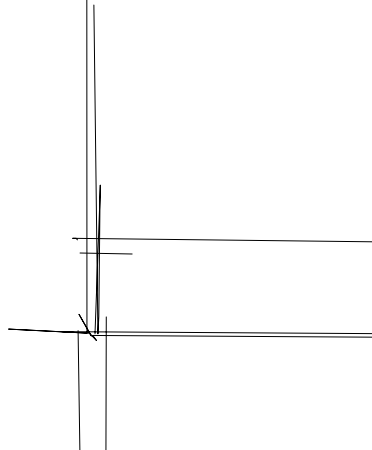

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Mo

Moisture Resistant Packaging

